



Your Single Source Solution

EZ-Pull® Line Sets

APPLICATIONS

Ductless mini-split systems. VRF commercial systems. Split system (A/C & Heat Pump).

SPECIAL FEATURES

- Meets ASTM E84 for smoke and fire (25/50)
- Superior tear resistance
- Rugged, anti-tear exterior allows for easier installation of the line set
- UV Resistant
- R410 A Approved
- Insulation is marked every foot
- Paintable

TECHNICAL SPECIFICATIONS

Copper Tubing: Commercial Grade Refrigeration Tubing

Copper: No. C122200 DHP (Phosphorous deoxidized, high residual phosphorous)

Low-density Polyethylene Foam: Closed cells foam, CFC and HCFC gas free

Insulation: According to ASTM E96-00

Working Temperature: Meets/exceeds ASTM C 1427-07

Surface Burning Characteristics: UL 94HBT, UL 723, ASTM E84 (25/50), flame and spread index less than 25 and smoke development index less than 50 as tested according to UL 723.

Wall Thickness: 1/2" & 3/4"

EZ-Pull - Insulation (White Hard Shell):

Ductless: 1/4" - 1 1/8"

Plain End 1/4" - 1 1/8"

Insulated Copper Tube: 1/4" - 1 1/8"


Lengths: 10' - 100' and 164' coils

INSULATION R VALUES

1/2" Wall - R3.3

3/4" Wall - R5.2

*R - Value calculation using a K-Factor of 0.25 BTU-in/hr-ft (2)-F @ 75°F, 24°C mean temp.

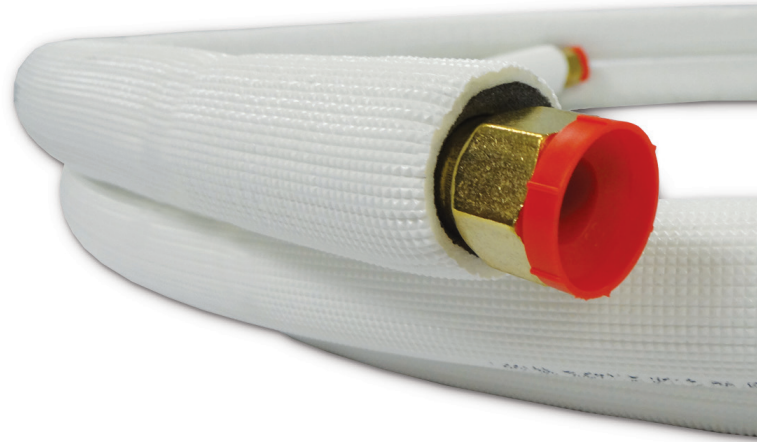

EZ-PULL line sets can be ordered with Flare Nuts (above) or Plain End (below)



JMF OFFERS MORE LINE SET PRODUCT OPTIONS THAN ANYONE IN THE INDUSTRY.

JMF COMPANY IS YOUR CONSOLIDATING SOURCE FOR copper tubing, line sets, copper fittings, push to fit, pex, ball valves, gas valves, plumbing valves, malleable fittings, steel nipples, plastic fittings, brass threaded, brass nipples, flare & compression, gas connectors, water connectors, appliance kits, cord sets and MORE.

