



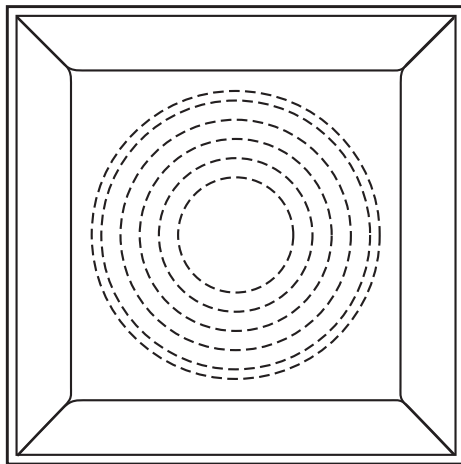


PERFORATED CEILING DIFFUSERS
FIBERGLASS PLENUM
RETURN • 24" X 24" MODULE FOR T-BAR CEILINGS
MODEL: 4350R

TYPE L Lay-in T-Bar

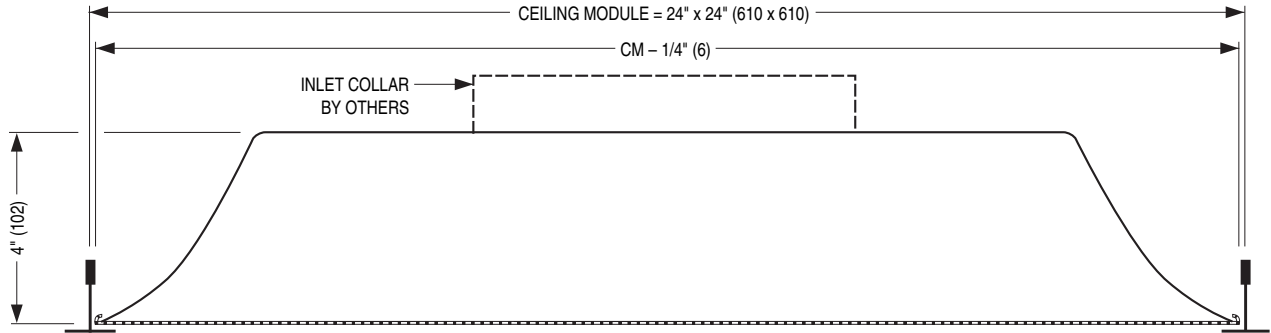

TYPE S Surface Mount

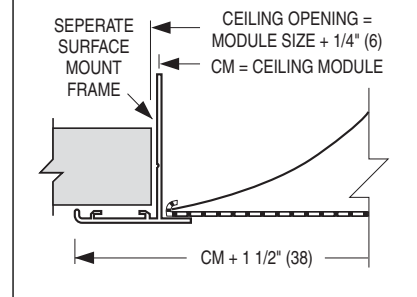

DESCRIPTION:

1. Corrosion-resistant steel diffuser face. One piece molded fiberglass back pan with foil back vapour barrier. 6.0 R-value.
2. Diffuser features a smoothly contoured back pan and wrap around fixed perforated face. Designed to match supply model 4350 in appearance, except pattern controllers are omitted.
3. Perforated face has 3/16" (5) diameter holes on 1/4" (6) staggered centers. 51% free area.
4. Pre-scored plenum for 6", 8", 10", 12", 14" or 15" (152, 203, 254, 305, 356 or 381) spin-in or tab-lock inlet collar (by others) for ducted return applications.
5. Standard finish is AW Appliance White face and black interior.

OPTIONS:

Finish:
 SP Special _____.

SCHEDULE TYPE:	
PROJECT:	
ENGINEER:	
CONTRACTOR:	

Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
1 - 7 - 11	4300	NEW	4350R