



Gorelock Spiral Reducers




Hercules offers premium Spiral Reducers designed to decrease or increase spiral duct pipe in your HVAC system. It features 24-gauge, galvanized steel construction. Both ends slightly undersized for connection to spiral pipe.

- HVAC part used to connect 8 in. Spiral Pipe to 6 in. Spiral Pipe
- 24-gauge, galvanized steel construction
- Both ends slightly undersized for connection to Spiral Pipe
- Also used to increase Spiral Pipe size
- Seal and insulate if needed
- All gauges and reinforcements are in compliance with 2005 SMACNA standards for duct fabrication

SPECIFICATIONS:

Type: One Tap (Straight)

- A: Inlet Diameter
- B: Tube Length
- C: Outlet Diameter
- F: Flange

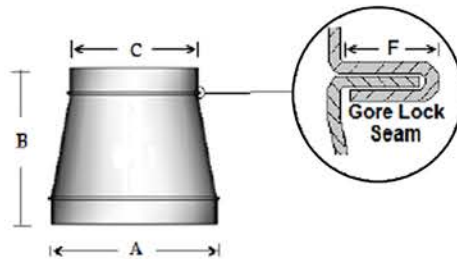

Seam	Small Gore Lock F= 1/4"	Medium Gore Lock F= 7/16"	Large Gore Lock F= 3/8"
Thickness	24 Ga. Min- 18 Ga. Max	22 Ga. Min- 18 Ga. Max	20 Ga. Min- 18 Ga. Max
Diameter	8" to 10"	12" to 26"	28" to 48"

Spiral Reducers Range	Material	Thickness Range	ASTM	Type
8" to 48"	Galvanized	0.023-0.063 (24-16 Gauge)	A-653	G-90
8" to 48"	Galvanneal	0.023-0.063 (24-16 Gauge)	A-653	A-40
8" to 48"	PCD	0.023-0.063 (24-16 Gauge)	A-653	4X4, 4X4
8" to 48"	Aluminum	0.032-0.050	B-316	3003 H-14
8" to 48"	Stainless Steel	0.023-0.036 (24-22 Gauge)	A-420	304



1-800-870-4305

